


F

Ausbaustück F PN 10

Nennweite DN	Gewicht ca. kg	Baulänge mm	passend für äußeren Rohr - Ø mm	Länge A mm	Verstellbarkeit ± x mm	größter Durchmesser D mm
40	8	170	44,5 / 48,3	70	40	150
50	9	170	57 / 60,3	70	40	165
65	10	170	76,1	70	40	185
80	12	170	88,9	70	40	200
100	16	170	108 / 114,3	70	40	220
125	19	170	133 / 139,7	70	40	250
150	23	170	159 / 168,3	70	40	285
175	28	170	191 / 193,7	70	40	315
200	33	170	216 / 219,1	70	40	340
250	43	200	267 / 273	90	50	395
300	51	200	318 / 323,9	90	50	445
350	60	200	368 / 355,6	90	50	505
400	67	200	419 / 406,4	90	50	565
450	73	200	470 / 457,2	90	50	630
500	82	210	521 / 508	90	50	670
550	107	210	572 / 558,8	90	50	740
600	115	210	622 / 609,6	90	50	780
650	130	210	670 / 660,4	90	50	840
700	141	220	720 / 711,2	90	50	895
800	178	220	820 / 812,8	90	50	1015
900	202	220	920 / 914,4	90	50	1115
1000	238	220	1020 / 1016	90	50	1230
1100	278	220	1120	90	50	1345
1200	349	230	1220	105	50	1455
1300	404	230	1320	105	50	1570
1400	443	230	1420	105	50	1675
1500	487	230	1520	105	50	1800
1600	576	230	1620	105	50	1915
1800	724	240	1820	105	55	2115
2000	905	240	2020	105	55	2325

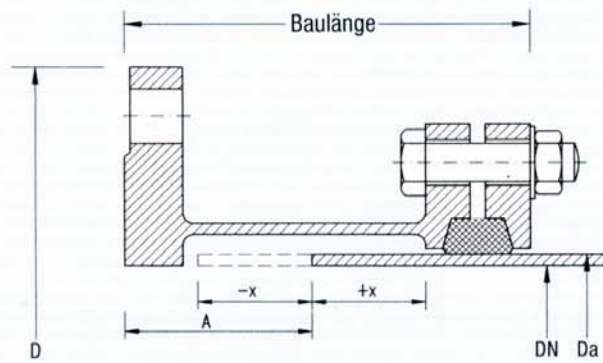

F

Ausbaustück F PN 16

Nennweite DN	Gewicht ca. kg	Baulänge mm	passend für äußeren Rohr - Ø mm	Länge A mm	Verstellbarkeit ± x mm	größter Durchmesser D mm
40	8	170	44,5 / 48,3	70	40	150
50	9	170	57 / 60,3	70	40	165
65	10	170	76,1	70	40	185
80	12	170	88,9	70	40	200
100	16	170	108 / 114,3	70	40	220
125	19	170	133 / 139,7	70	40	250
150	23	170	159 / 168,3	70	40	285
175	28	170	191 / 193,7	70	40	315
200	33	170	216 / 219,1	70	40	340
250	44	200	267 / 273	90	50	405
300	53	200	318 / 323,9	90	50	460
350	69	200	368 / 355,6	90	50	520
400	78	210	419 / 406,4	90	50	580
450	87	210	470 / 457,2	90	50	670
500	104	220	521 / 508	90	50	715
600	144	220	622 / 609,6	90	50	840
700	164	230	720 / 711,2	90	50	910
800	197	230	820 / 812,8	90	50	1025
900	254	230	920 / 914,4	110	50	1125
1000	281	230	1020 / 1016	110	50	1255
1100	333	230	1120	105	50	1360
1200	421	250	1220	105	50	1485
1400	505	250	1420	105	50	1685